

Module carrier - TC-D37SUB-AIO16-EX-PS-UNI - 2902932

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Universal termination carrier for connecting 16 MACX Analog Ex i signal conditioners to digital or analog I/O cards, via D-SUB connector, 37-pos. (1:1 connection), with HART multiplexer connection

Why buy this product

- Mechanically decoupled, passive PCB
- Robust aluminum profile with integrated DIN rail
- Side parts with integrated end clamps
- D-SUB pin strip system connection, 37-pos. (1:1 connection)
- Simple or redundant supply (decoupled from diode, protected against polarity reversal) and monitoring function implemented via separate DIN rail module
- Interface for connection to HART multiplexer
- Cable sets for signal connection are supplied as standard and do not have to be ordered separately



Key Commercial Data

Packing unit	1 STK
GTIN	 4 046356 697989
GTIN	4046356697989

Technical data

Note

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---

General

Nominal voltage U_N	< 30 V DC (Per signal/channel)
Max. permissible current	23 mA (Signal/channel)
Degree of protection	IP00
Degree of pollution	2
Overvoltage category	II

Module carrier - TC-D37SUB-AIO16-EX-PS-UNI - 2902932

Technical data

Supply

Designation	Power module
Note	Power supply via 2904673 TC-MACX-MCR-PTB power supply and error signaling module.
Input voltage	24 V DC
Input voltage range	19.2 V DC ... 30 V DC
Input current	≤ 2 A
Redundant supply	yes, decoupled from diodes
Polarization and surge protection	Yes
Output name	Switching output
Contact type	1 N/C contact (alarm = open)
Maximum switching voltage	50 V DC (0.3 A)
Fuse	2x 2.5 A on PCB, slow-blow (replaceable)
Status display	1 x red LED (error)
	2x green LEDs (PWR1 and PWR2)

Ambient conditions

Ambient temperature (operation)	-20 °C ... 60 °C (Please observe module specifications)
Ambient temperature (storage/transport)	-40 °C ... 80 °C
Permissible humidity (operation)	5 % ... 95 % (non-condensing)
Shock	15g, according to IEC 60068-2-27
Vibration (operation)	2g, according to IEC 60068-2-6
Maximum altitude	≤ 2000 m

Dimensions

Width	242 mm
Height	170 mm
Depth	160 mm

Standards and Regulations

Shock	15g, according to IEC 60068-2-27
Designation	Air clearances and creepage distances
Standards/regulations	DIN EN 50178
Rated insulation voltage	50 V
Rated surge voltage	0.5 kV
Insulation	Basic insulation
Flammability rating according to UL 94	V0
Vibration (operation)	2g, according to IEC 60068-2-6
ATEX	# II 3 G Ex nA IIC T4 Gc X
UL, USA/Canada	UL 61010 Listed
	Class I, Div. 2, Groups A, B, C, D T4
	Class I, Zone 2, Group IIC

Environmental Product Compliance

Module carrier - TC-D37SUB-AIO16-EX-PS-UNI - 2902932


Technical data

Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings

Circuit diagram

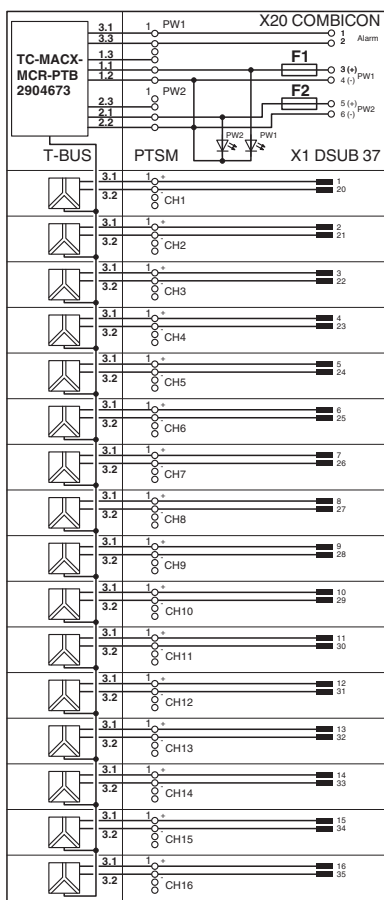

Articles in set

Cable set - TC-C-MAX2-SC-31320000 - 2902425



Cable set for signal transmission on the Termination Carrier for modules from the MACX Analog Ex series. Connection of terminal points 3.1 and 3.2 (signal transmission) to the signal PCB.

Module carrier - TC-D37SUB-AIO16-EX-PS-UNI - 2902932

Articles in set

Cable set - TC-C-PTB3-SC-SET1 - 2905216



Cable set for TC-MACX-MCR-PTB power and fault signaling module (Order No. 2904673), for use on the Termination Carrier for signal conditioners from the MACX Analog Ex series.

Electronic housing - ME 17,5 TBUS 1,5/ 5-ST-3,81 GN - 2709561



DIN rail connector for DIN rail mounting. Universal for TBUS housing. Gold-plated contacts, 5-pos.

DIN rail bus connectors - ME 6,2 TBUS-2 1,5/5-ST-3,81 GN - 2869728



DIN rail connector for DIN rail mounting. Universal for TBUS housing. Gold-plated contacts, 5-pos.

Approvals

Approvals

Approvals

EAC / UL Listed / cUL Listed / UL Listed / cUL Listed / cULus Listed

Ex Approvals

ATEX / UL Listed / cUL Listed / UL Listed / cUL Listed / cULus Listed

Approval details

EAC		RU *- DE.A*30.B.01735
-----	--	--------------------------

UL Listed		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm FILE E 330267
-----------	--	---

Module carrier - TC-D37SUB-AIO16-EX-PS-UNI - 2902932

Approvals

cUL Listed		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 330267
------------	--	---	---------------

UL Listed		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 330267
-----------	--	---	---------------

Nominal current IN	1 A
Nominal voltage UN	50 V

cUL Listed		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 330267
------------	--	---	---------------

Nominal current IN	1 A
Nominal voltage UN	50 V

cULus Listed	
--------------	--

Phoenix Contact 2017 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>