

NOTES:

- 1.0 ELECTRICAL SPECIFICATIONS:
- 1.1 FREQUENCY RANGE: DC to 18.0 GHz
- 1.2 MAXIMUM INPUT POWER: 10 WATTS AVG AT +40°C DERATED LINEARLY TO 1 WATT AT +125°C
- 1.3 OPERATING TEMP. RANGE: -55°C to +125°C
- 1.4 IMPEDANCE: 50 OHMS
- 1.5 MAXIMUM VSWR: 1.05 + 0.01f(GHz)
- 2.0 MARKING: MARK UNIT AS SHOWN. (REF.: INK-01526-27-05)
- 3.0 DIMENSIONS IN PARENTHESIS ARE IN MILLIMETERS.

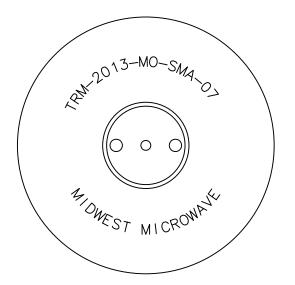

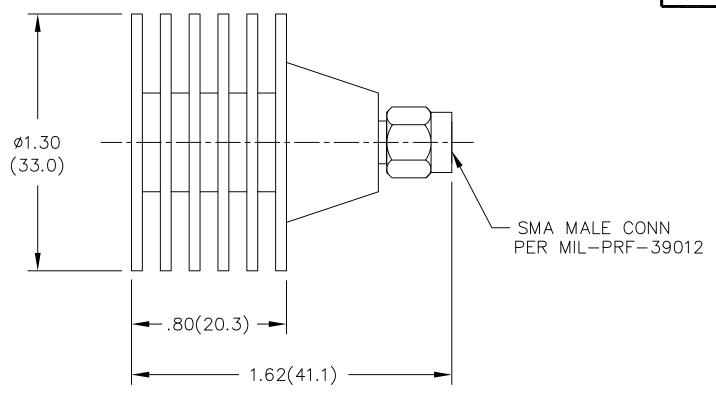

DWG NO. WAS 01313-01-00

REV.	DESCRIPTION	DATE
ı	RELEASED	3/25/92
٧	CHANGE DIMENSIONS	2/15/92
В	ECR 0068	3/30/79
၁	ECR 6545	6/56/89
D	REDRAW ON CAD ADD SPECS. 3/17/92	3/17/92
Ε	ECN 15506	9/23/6
E1	ADDED TITLEBLOCK	10/26/05

UNLESS OTHERWISE NOTED DIMENSIONS	34078	MIDW	EST	MIC	ROV	VA	V_{I}	E
ARE IN INCHES AND TOLERANCES ARE:	NOTICE: The information contained in this							
3 PLACE DECIMALS ±.005	drawing is	proprietary	TERMINATION					
2 PLACE DECIMALS ±.02	and must n							
FRACTIONS ±1/64	without the of Midwest							
PARALLELITY: T.I.R								
FLATNESS: T.I.R	DRAWN/DATE A.BEATTY 3/17/92	eng./date G.KOZAK 3/25/92	DRAWING NUM		MA-07			
CONCENTRICITY: T.I.R	CHECKED/DATE							
ANGLES AND PERPENDICULARITY: ±1°			SCALE: 2	2=1	SHEET	1	of	1

TRM-2013-MO-SMA-07 MODEL NUMBER