
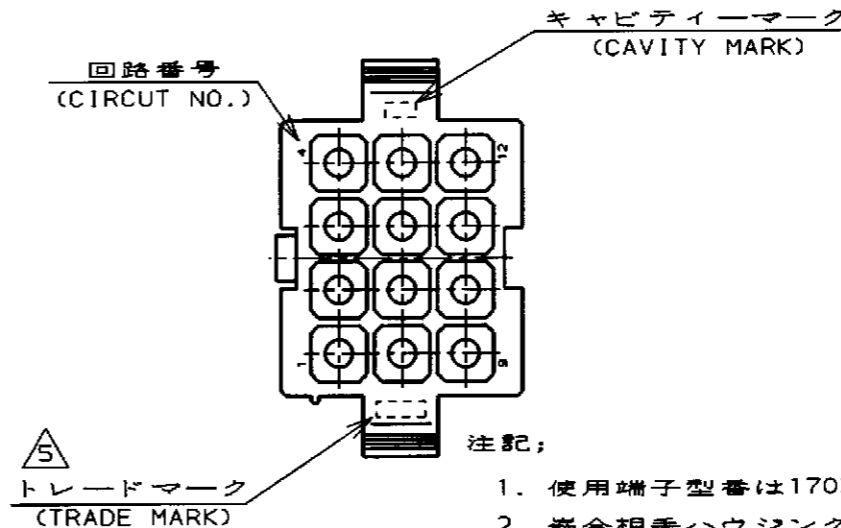
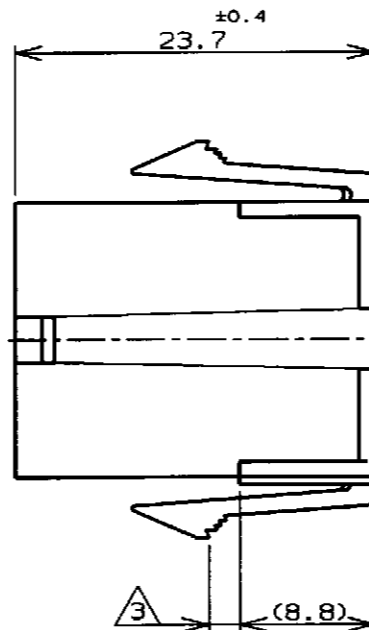


P	LTR	DESCRIPTION	DATE	DWN	APVD
C2		REVISED PER ECO-11-005140	30MAR11	RK	HMR

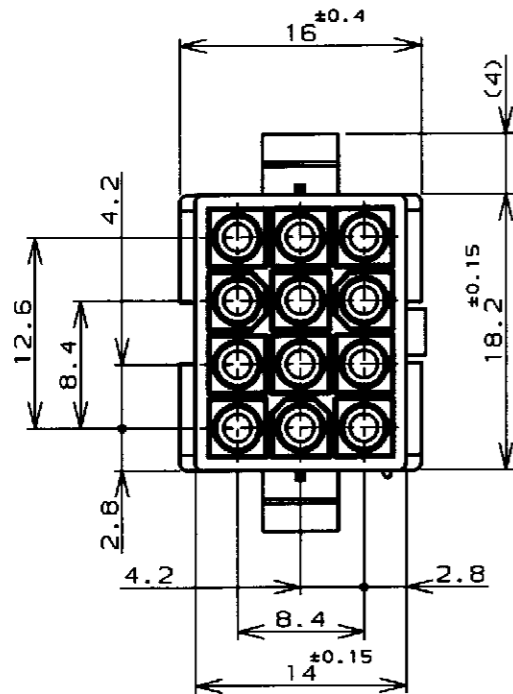


注記:

1. 使用端子型番は170359, 170360, 170361, 170362
2. 嵌合相手ハウジング型番は172170
3. 適用パネル厚 0.8-2.0mm
4. 取付穴打抜方向とハウジングの挿入方向は同じとする。
5. 表1参照

NOTE:

1. APPLICABLE CONT P/N: 170359, 170360, 170361, 170362
2. MATING HSG P/N: 172170
3. APPLICABLE PANEL THICKNESS: 0.8-2.0mm
4. HOUSING INSERTION INTO THE PANEL CUT-OUT MUST BE DONE IN THE SAME DIRECTION WITH PUNCH KNOCKING.
5. SEE TABLE 1
6. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

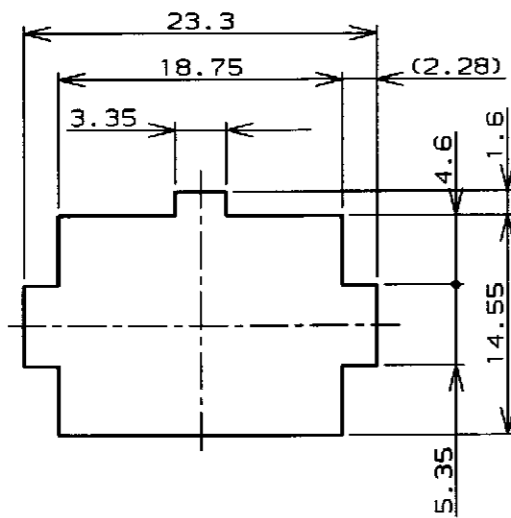

寸法公差は±0.20 (TOLERANCE: ±0.20)

パネル取付穴 (RECOMENDED PANEL OPENING DIMENSION)

表1 (TABLE 1)

トレードマーク (TRADE MARK)	生産場所 (MANUFACTURING PLACE)
-AMP OR AMP	日本 (JAPAN)
-+AMP OR AMP	中国 (CHINA(PRC))

6 OBSOLETE

黒 (BLACK)	1-172162-9
青 (BLUE)	1-6
緑 (GREEN)	1-5
赤 (RED)	1--2
自然色 (NATURAL)	172162-1
色 (COLOR)	型番 (P/N)

WIRE RANGE (組合電線断面積)	INSULATION DIA (被覆外径)
—//—	—//—

DIMENSIONS: 単位: 概 mm		TOLERANCES UNLESS OTHERWISE SPECIFIED		DWN: M. Yamazaki 8 Jun '98		TE Connectivity	
一般公差 (GENERAL TOLERANCE)		±0.3		CHK: M. Shin 15 Jun '98		NAME: 12極ミニユニバーサルメイトンロックキャップハウジング (UL94V-0)	
MATERIAL: 66ナイロン UL94V-0 (66NYLON UL94V-0)		FINISH: 仕上		APVD: M. Shin 15 Jun '98		12Pos MINI UNIVERSAL MATE-N-LOCK CONN. CAP HOUSING (UL94V-0)	
PRODUCT SPEC: 108-5138		INSTRUCTION SHEET: IS-105J		WEIGHT: —//—		SIZE: A3 CAGE CODE: 00779 DRAWING NO: C=172162 RESTRICTED TO: —//—	
CUSTOMER DRAWING				SCALE: 2-1		SHEET 1 OF 1 REV C2	