


UNIT:mm

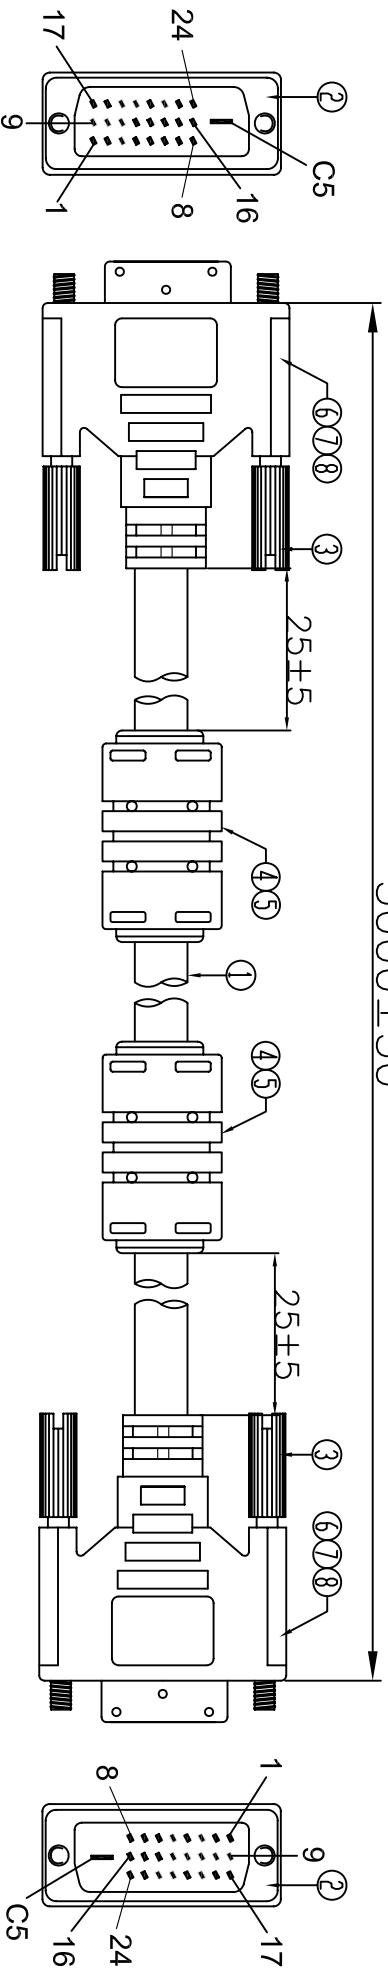

- Electronic Test:
- 1.100% Test,(Open,Short,Miss Wire)
 - 2.Contact Resistance:2 ohm max.
 - 3.Insulation Resistance:10M ohm min.
 - 4.Hi-Pot:300V DC/10ms
 - 5.BENDING TEST:ANGLE 90°,BENDING 2~3 TIMES UP AND DOWN.

⑧	TUBE	14	HEAT SHRINK TUBE BLACK OD2.0mm L=8mm.
		8	HEAT SHRINK TUBE BLACK OD1.5mm L=15mm.
⑦	Copper	2	HEAT SHRINK TUBE BLACK OD1.0mm L=25mm.
⑥	NI JACKET	8g	DOUBLE-SIDED CONDUCTIVE COPPER FOIL W30mm*L75mm
	OUT JACKET	30g	CLEAR PE(NM-15)
⑤	OUT JACKET	20g	WHITE(EC-005/W-18#) PVC 50P(WM-17)
④	FERRITE	2	BLACK PVC 45P (CH-002)
③	SCREW	4	Core:RH17.5*10.6*28.5mm
②	CONN	2	SCREW #4*40UNS Ø2.8*L32mm NICKEL MOLD WHITE(EC-005/W-18#) ABS
①	CABLE	1	DVI MALE 24+1 INSULATION BLACK:SHELL NICKEL,PIN GOLD FLASH. UL20276 [(28AWG/1P+DW+AL/(M))*7C+28AWG*5C]+AL/(M)+BD+D.W+BD+JACKET:BLACK OD:8.6±0.15mm L=3000+30/-0mm.
NO.	NAME	Q'TY	SPECIFICATION

Cnc Tech, LLC

Industrial Cable and Connector Technology

DRAWN BY	ZHONGHS	DRAWING NO.	
CHECKED BY		CUSTOMER	
APPROVAL BY		ITEM NO.	750-10011-00300
DECIDE BY		DATE	2012-02-07
VERSIONS/EDITION	A/0	PROJECTION	—  —