


STRIPPING DIMENSION

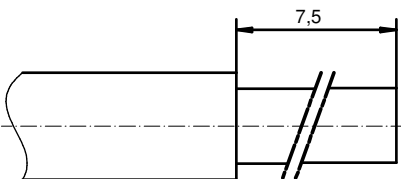

Directive 2002/95/EC RoHS compliant

3	1	RETAINING RING	COPPER ALLOY	NICKEL PLATED
2	1	REAR SIDE	COPPER ALLOY	GOLD FLASH over NICKEL
1	1	FRONT SIDE	COPPER ALLOY	min. 30µin HARD GOLD over min. 50µin NICKEL
pos	qty	description	material	plating

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND		tolerance		scale: 5:1	
		ISO 2768-m		material: SEE PARTLIST	
		dim. in mm		title:	
		date		HIGH POWER CONTACT MALE	
		name		SOLDER CUP 30A FOR AWG 10-12; d=3,5mm	
		drawn 03.01.11 Henneboel		D-SUB COMBINATION	
		appd. 03.01.11 Koch		dwg no:	
		norm		13K1A3531	
		d-old		DIN-A3	
		a Origin		sh: 1	
		rev. description date name		part no: 131C10139X	
		<b>CONEC</b>			