


**Laird Technologies**  
 Web site: [www.LairdTech.com](http://www.LairdTech.com)

All Categories > EMI Solutions > EMI Shielding & Gaskets > Board-Level Shielding > Standard Surface Mount Shields-Two-Piece > Item # BMIS-207

### Item # BMIS-207 Standard Surface Mount Shields-Two-Piece

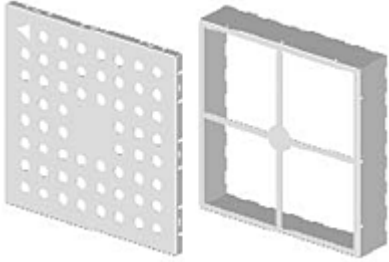

[larger image](#)

- 121, 169, 225, 313 BGA
- 32, 44, 52, 68, 84 PLCC
- 48, 100, 208 VQFP
- 44, 48, 64, 80, 100, 120, 160 QFP

### Specifications

<b>Surface Area</b>	2.997 inches <sup>2</sup>
<b>Surface Area</b>	1933.36 mm <sup>2</sup>
<b>Maximum Overall Dimension</b>	1.747 x 1.747 inches
<b>Maximum Overall Dimension</b>	44.37 x 44.37 mm
<b>Maximum Overall Height</b>	0.384 inches
<b>Maximum Overall Height</b>	9.75 mm
<b>Material Thickness</b>	0.20 mm
<b>Carrier Tape Width</b>	56 mm
<b>Carrier Tape Pitch</b>	56 mm
<b>Weight</b>	3.2 gms
<b>Pick-up Spot Diameter</b>	≥ 6 mm
<b>Carrier Tape Material</b>	LTIMS-LCB
<b>Cover Tape Material</b>	LTIMS-PSA
<b>Reel Diameter</b>	381 mm
<b>Reel Material</b>	Plastic
<b>Parts Per Reel</b>	120
<b>Material</b>	0.20 mm CRS Tin
<b>Packaging</b>	EIA-481
<b>Co-planarity (Test LTWI-1119 &amp; ANSI/JSTD-002)</b>	< 0.10 mm
<b>Solderability (Test MIL-STD-202 Method 208)</b>	>99 %
<b>Surface Mount Solderability (Test ANSI/EIA 638)</b>	Passes

<b>Appearance (Test LTIES-125)</b>	Passes
<b>Adhesion (Test ASTM B-571)</b>	Passes
<b>3 Axis Mechanical Shock (Test LTES-461)</b>	Passes

[Print](#) [Back](#)