

MICRO SWITCH
 FREEPORT ILLINOIS U.S.A.
 A DIVISION OF HONEYWELL
 FED MFG CODE 91929


**SWITCH - TOGGLE
 FLUSH KEY**

CATALOG LISTING
2TP1-70


THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CIRCUIT DIAGRAM


LUG SIDE
 (MOMENTARY POSITION)



CENTER
 (MAINTAINED POSITION)



OPPOSITE LUG
 (MOMENTARY POSITION)




ELECTRICAL DATA

L192 10A 125, 250, 277 VAC
 1/4HP 125 VAC,
 1/2HP 250, 277 VAC
 3A 125 VAC "L"



2TP1-70
 M
 DRAWING NUMBER
 13
 ISSUE
 10
 REVISIONS
 A C050791
 J A P
 10 JUN 82
 B C056164
 J A P
 6 MAR 85
 C C057496
 C J H
 24 SEP 85
 D C058717-B
 W J K
 22 OCT 86
 D C060389
 W J H
 10 NOV 86
 E C077697
 T S H
 15 JUN 94
 F C094412
 D L M
 13 OCT 99
 FORMTEK
 FO-52854-C
 DRAWN
 JAP 10 JUN 82
 CHECK C E B
 14 JUNE 82
 CHECK K Y C
 11 AUG 82
 REPLACES
 SR13112
 PAGE 1 OF 1
 RELEASE NO

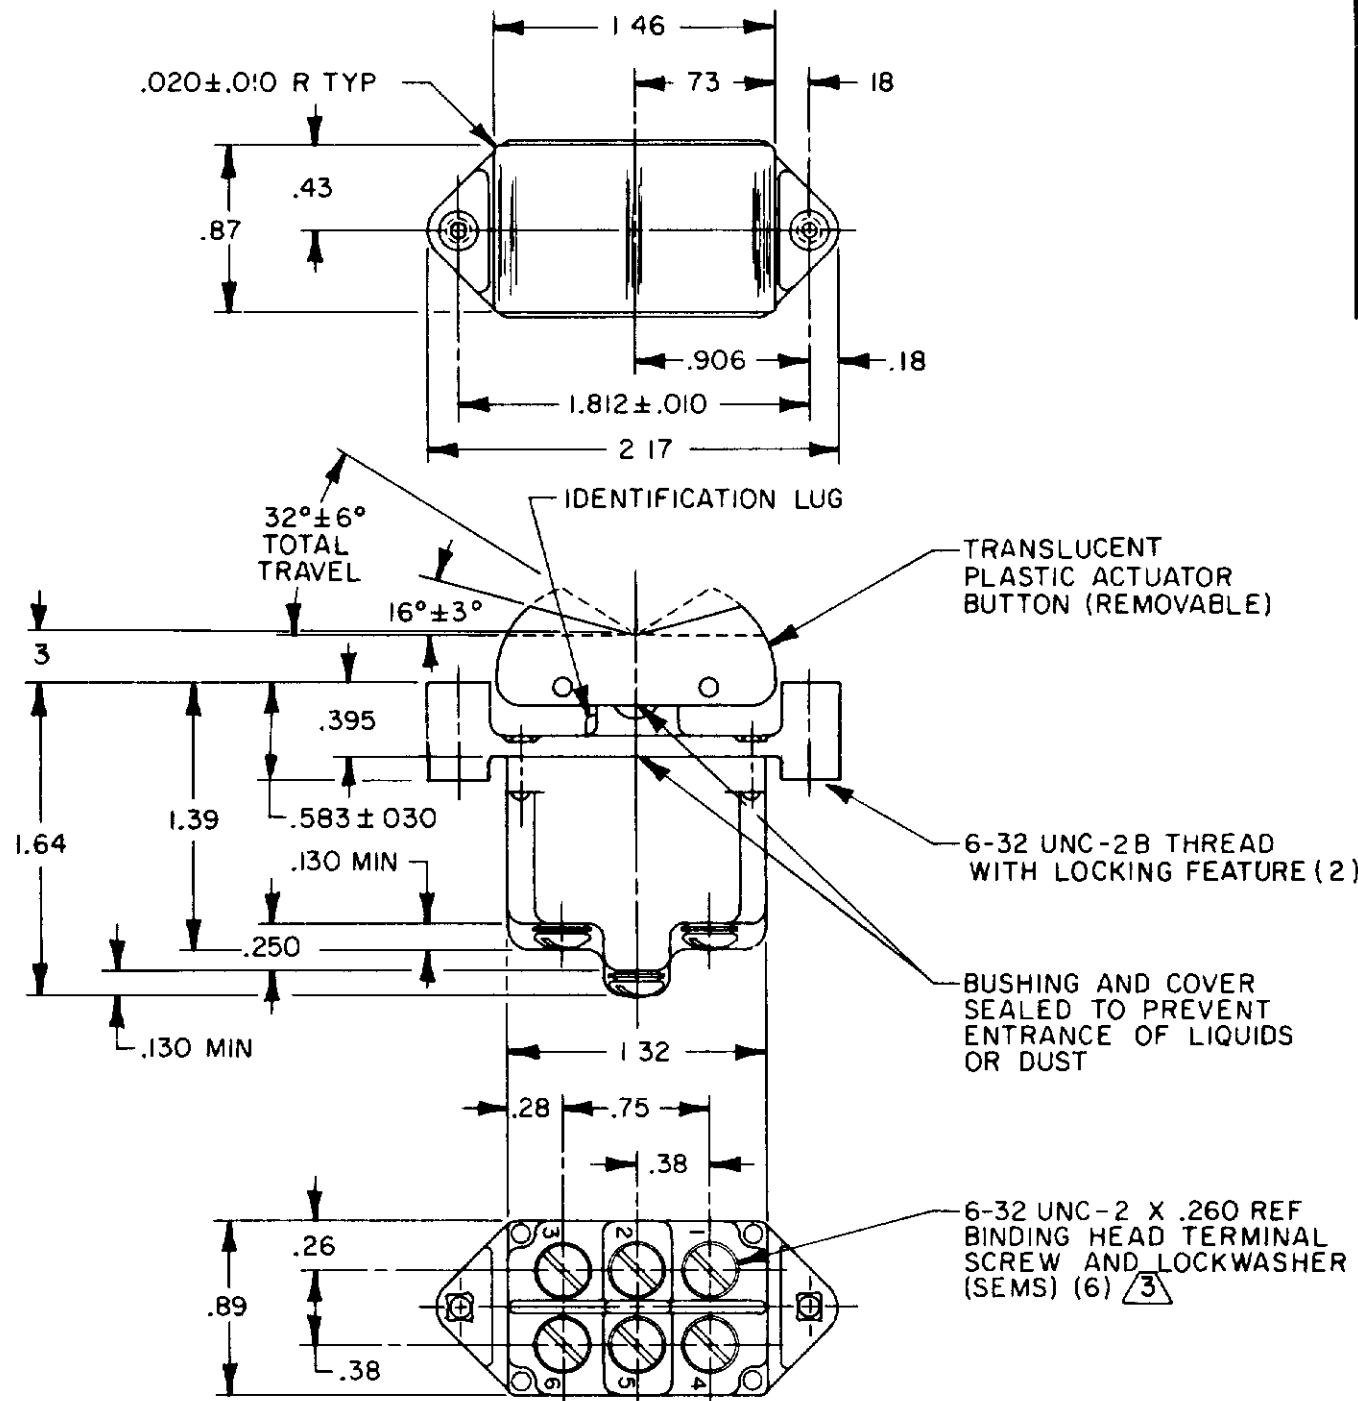

- NOTES**
- 1 - SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160°F @ FULL RATED LOAD
 - 2 - MICRO SWITCH CATALOG LISTING MARKED ON SIDE OF SWITCH
 - 3 - SCREWS FURNISHED UNASSEMBLED

THIRD ANGLE PROJECTION

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS CONVERSIONS ARE ONLY FOR REFERENCE UNLESS NOTED TOLERANCES ARE ±

| NO PLACES | DIM | TOL | DIM | TOL |
|--------------|---------|----------|-----------|----------|
| | mm | mm/in | in | mm/in |
| NO PLACES | X | 17/04 | X X | 0.87/03 |
| ONE PLACE | X X | 0.41/016 | X X X | 0.36/015 |
| TWO PLACES | X X X | 0.15/006 | X X X X | 0.15/005 |
| THREE PLACES | X X X X | | X X X X X | |
| ANGLES | | | | |

DESIGN UNITS METRIC US CUSTOMARY

WEIGHT .14 LB EST