

LONG-RANGE 900 MHZ INDUSTRIAL RADIO

DIGI XLR PRO®

900 MHz industrial radios provide best-in-class range and interference immunity to enable data communications even in the noisiest RF environments

The Digi XLR PRO is a high performance, industrial grade long-range 900 MHz radio that offers reliable wireless communications for serial and Ethernet devices over long distances.

Digi's patented Punch2® Technology enables the Digi XLR PRO to achieve industry-leading range from 1 to 100 miles and interference immunity that will punch through noisy RF environments. Flexible configuration options, including XCTU, local Web UI or Digi Device CloudSM, allow for quick configuration and deployment of multiple Digi XLR PRO radios in the field. Critical device management features include


over-the-air firmware updates, device status information and centralized remote management using Device Cloud.

Packaged in a sturdy, aluminum-cast enclosure, the Digi XLR PRO is ideal for industrial applications including oil/gas, precision agriculture and utilities. Brackets are available for DIN rail and wall mounting.

BENEFITS

- Patented Punch2® Technology enables industry-leading interference immunity
- Best-in-class range from 1 to 100 miles LOS
- Industrial aluminum-cast design with -40° C to +70° C temperature rating and Class 1 Division 2 certification
- Flexible data rates of up to 3.2 Mbps
- Simple configuration via XCTU, local WebUI or Device Cloud
- Industry-leading 4-year warranty

RELATED PRODUCTS XBee® Cellular Mounting Accessories XCTU Digi Device Cloud®

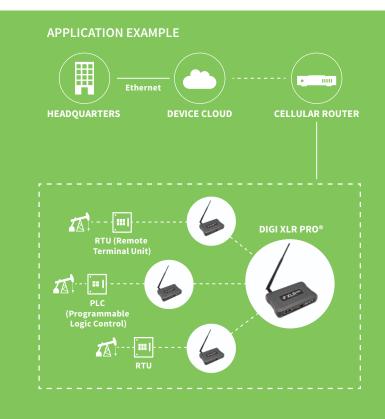

SPECIFICATIONS	Digi XLR PRO®	
GENERAL		
DIMENSIONS / WEIGHT	18 x 13 x 3.8 cm (7.1 x 5 x 1.5 inches) / 0.68kg (1.5 lbs)	
ETHERNET PHYSICAL LAYER	10/100BASE-T/TX	
ETHERNET PROTOCOLS	UDP/TCP, DHCP Client	
WARRANTY	4 years	
PERFORMANCE		
FREQUENCY RANGE	ISM 902 to 928 MHz	
RF DATA RATE	9.4 kbps to 3.2 Mbps	
TRANSMIT POWER (SOFTWARE SELECTABLE)	Up to 30 dBm (1 Watt)	
RANGE	Line-of-sight ideal environment w/ 6 dBi Yagi antenna / 100+ miles @ 1.2Mbps	
	Typical environment, some RF noise, w/ 6 dBi dipole antenna / 25 miles @ 9.4Kbps, 8 miles @ 141Kbps, 3.6 miles @ 591Kbps, 1 mile @ 3.2Mbps	
RECEIVER SENSITIVITY	-120 dBm @ 9.4 Kbps, -112 dBm @ 141 Kbps, -98 @ 3.2 Mbps	
RECEIVER SELECTIVITY	141 kbps: 70 dB (below 908 MHz, above 922 MHz) 40 dB (908 MHz to 922 MHz)	
THROUGHPUT DATA RATE (SOFTWARE SELECTABLE)	460.8 kbps (TCP/UDP Socket); 921.6 kbps (Serial RS-485); 460.8 kbps (Serial RS-232)	
NETWORKING AND SECURITY		
MODULATION	Punch2® Technology using Chirp Spread Spectrum	
SUPPORTED NETWORK TOPOLOGIES	Point-to-point/Point-to-multipoint	
ENCRYPTION	128-bit AES with 64-bit message integrity check	
POWER REQUIREMENTS		
SUPPLY VOLTAGE	9 to 26 VDC	
RECEIVE CURRENT	300 mA @ 9 V; 230 mA @ 12 V; 120 mA @ 26 V	
TRANSMIT CURRENT	950 mA @ 9 V; 840 mA @ 12 V; 400 mA @ 26 V	
ENVIRONMENTAL		
OPERATING TEMPERATURE	-40°C to +70°C	
REGULATORY APPROVALS		
EMISSIONS/IMMUNITY	FCC Part 15B (US), IC (Canada), RCM (Australia), Anatel (Brazil) and Peru	
HAZARDOUS LOCATIONS	Class 1 Division 2 Groups A, B, C, D	
POWER	UL 60950-1, 2nd edition, 2011-12-19	
CONNECTORS		
ANTENNA	50 Ohm RP-TNC (Female)	
POWER SUPPLY	Phoenix	
ETHERNET	(2) RJ45	
SERIAL	(1) RJ45 - RS232/485	
CONFIGURATION PORT	Mini-USB	
MOUNTING OPTIONS	DIN rail bracket, Wall mount bracket	

PART NUMBERS	DESCRIPTION
XL9-U	Digi XLR PRO Long-Range 900 MHz Modem, No Accessories – US/Canada/Mexico
XL9-UA	Digi XLR PRO Long-Range 900 MHz Modem, Includes Accessories – US/Canada/Mexico
XL9-A	Digi XLR PRO Long-Range 900 Mhz Modem, No Accessories - International
XL9-AA	Digi XLR PRO Long-Range 900 Mhz Modem, Includes Accessories - International

DIGI SERVICE AND SUPPORT / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit www.digi.com/support.

@ 1996-2016 Digi International Inc. All rights reserved. All trademarks are the property of their respective owners.

DIGI INTERNATIONAL WORLDWIDE HQ 877-912-3444 / 952-912-3444 / www.digi.com

DIGI INTERNATIONAL FRANCE +33-1-55-61-98-98 / www.digi.fr

DIGI INTERNATIONAL JAPAN +81-3-5428-0261 / www.digi-intl.co.jp DIGI INTERNATIONAL SINGAPORE +65-6213-5380

DIGI INTERNATIONAL CHINA +86-21-50492199 / www.digi.com.cn

